


ULIČNÍ VPUST

Měř.: 1:10


TBV-Q 600/400/T (s těsněním)

spodní díl

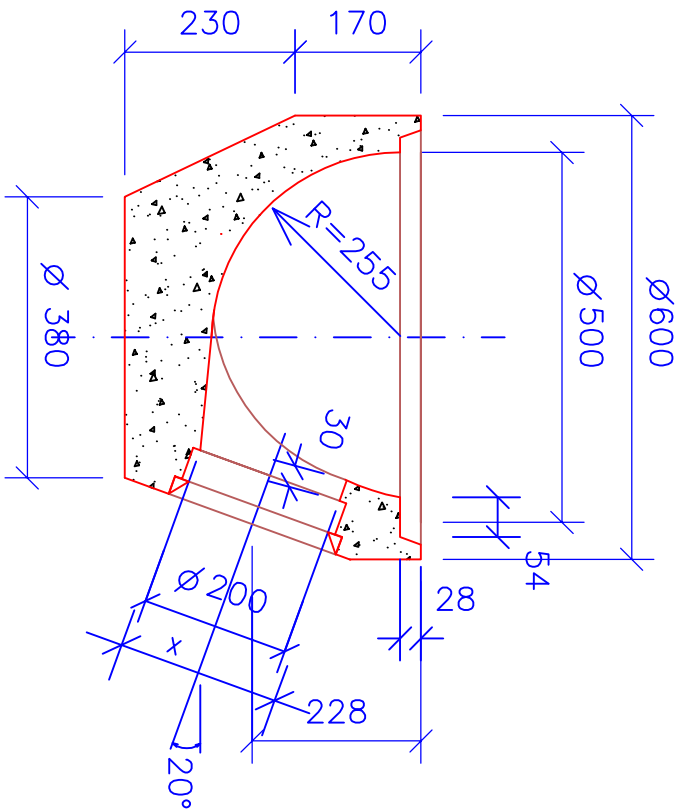


Příklad sestavy


M.: 1:20

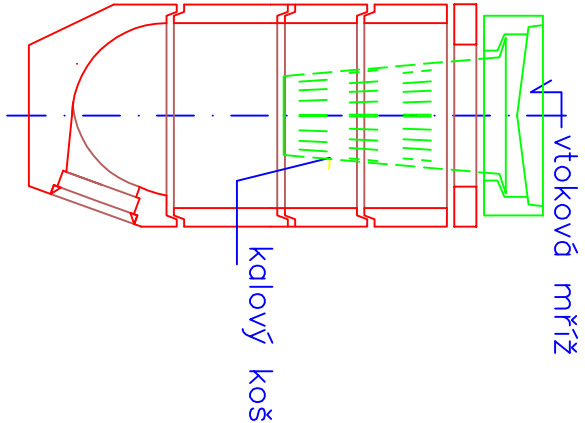

TBV-Q 600/400/B (bez těsnění)
spodní díl

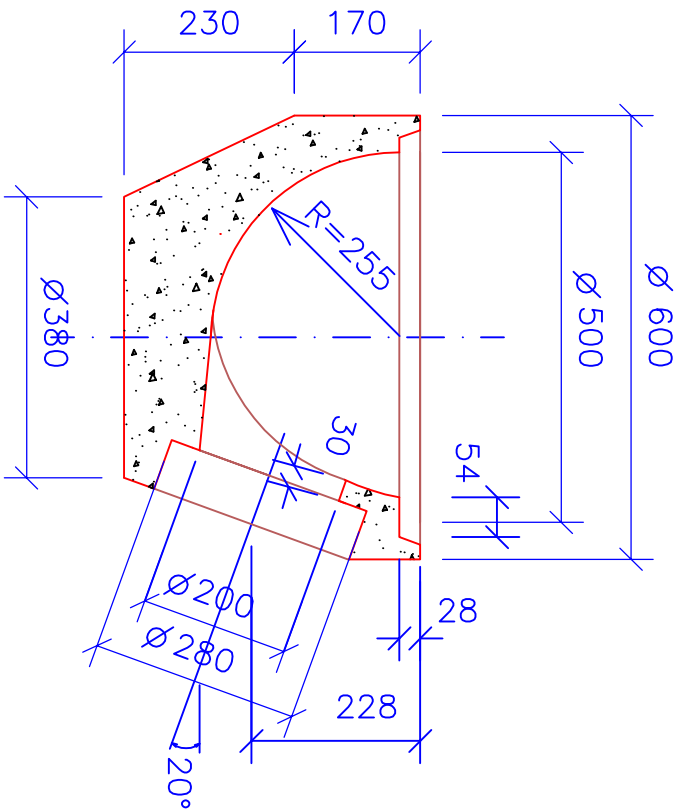


TBV-Q 600/60;80;100
krycí deska

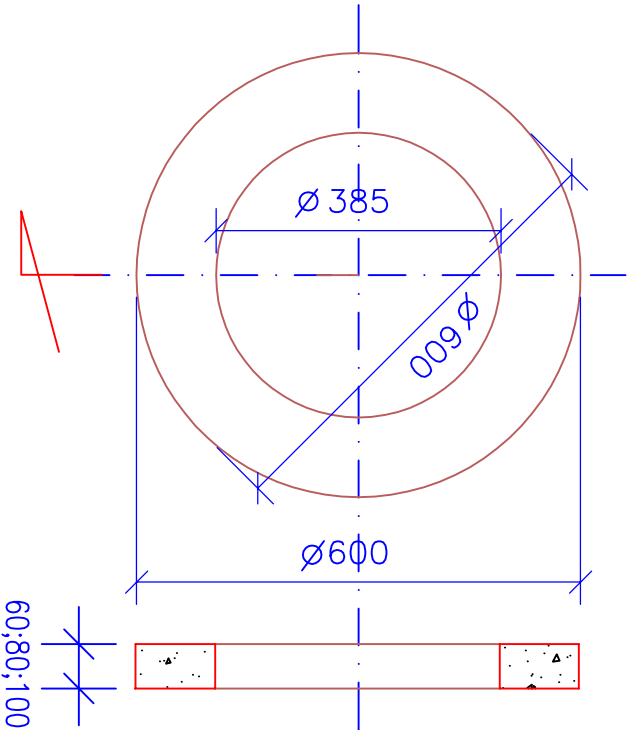


TBV-Q 500/300/5-1

skruž

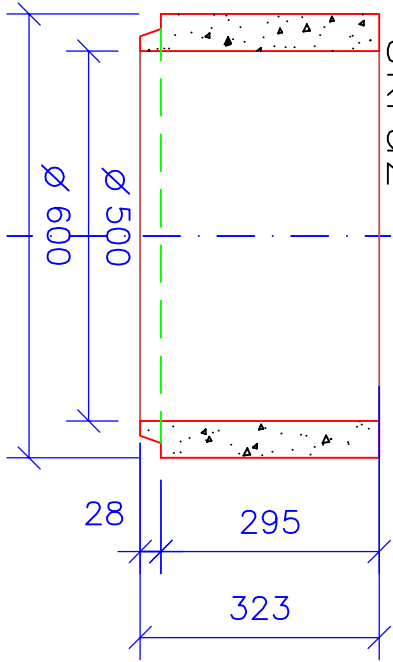


TBV-Q 500/200/5-1

skruž

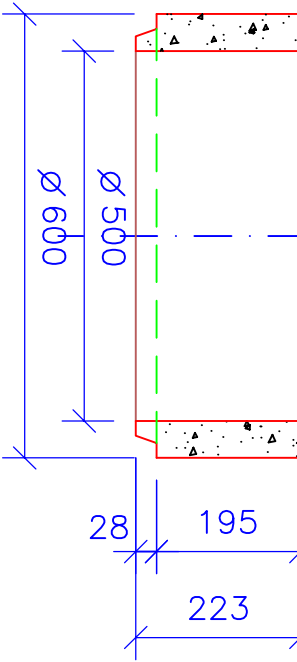


TBV-Q 500/200/5-1a

skruž

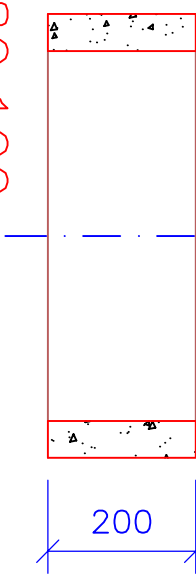


TBV-Q 500/300/5-2

skruž

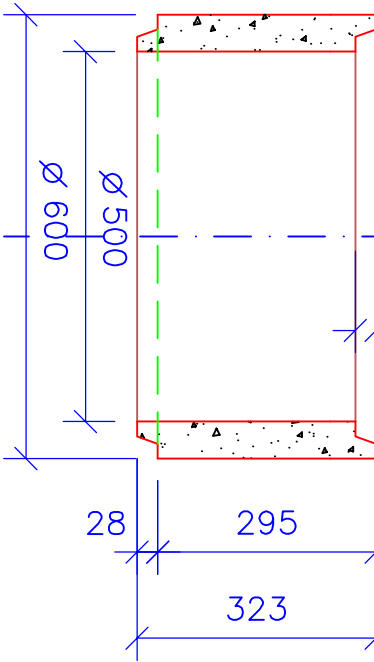

TBV-Q 500/200/5-2

skruž

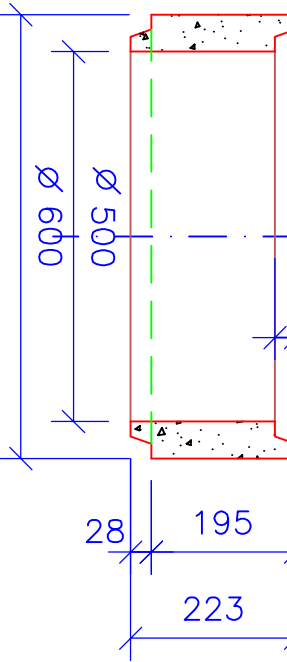

NAZEV PRVKU	OBJEM	HMOTNOST
SKRUŽE TBV-Q 500/300/5-1;2	0.030m ³	75.0kg
SKRUŽE TBV-Q 500/200/5-1;2	0.017m ³	42.5kg
SKRUŽE TBV-Q 500/200/5-1a	0.017m ³	42.5kg
SPOD.DÍL TBV-Q 600/400/T;B	0.036m ³	90.0kg
KRYCÍ DES. TBV-Q 600/60	0.010m ³	25.0kg
KRYCÍ DES. TBV-Q 600/80	0.014m ³	33.0kg
KRYCÍ DES. TBV-Q 600/100	0.017m ³	42.0kg
BETON C40/50 XA1		