

ULIČNÍ VPUST

Měř.: 1:10

TBV-Q 500/300/5-1

skruž

TBV-Q 600/400/T (s těsněním)  
spodní díl


Příklad sestavy

M.: 1:20

vtoková mříž


skruž

TBV-Q 500/200/5-1

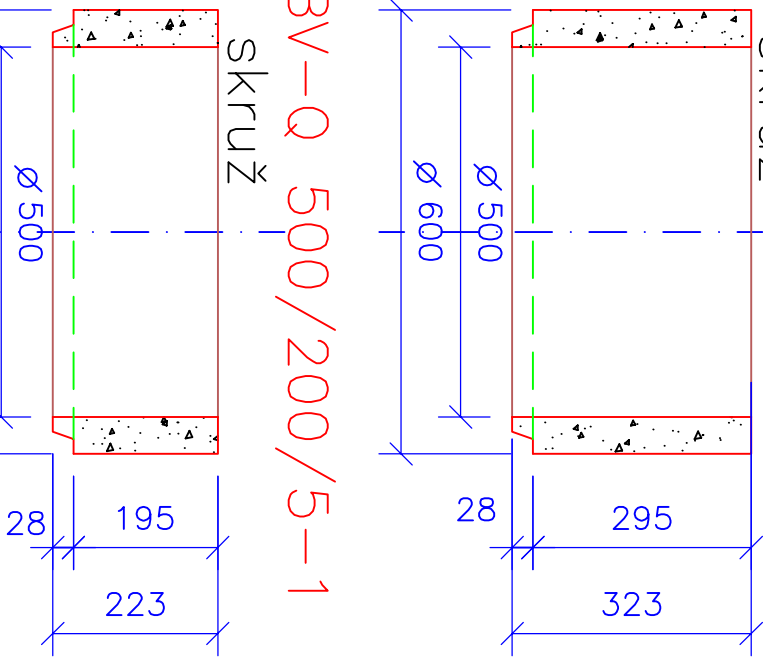


TBV-Q 500/300/5-2

skruž

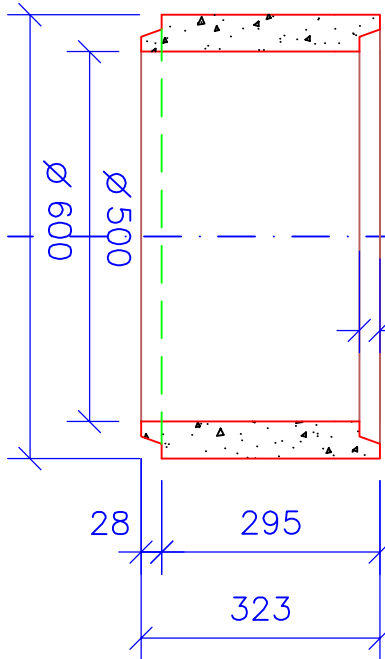


TBV-Q 500/200/5-2

skruž

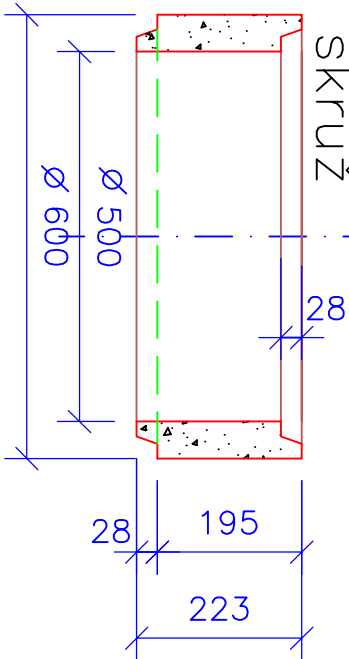

TBV-Q 500/200/5-1a




skruž

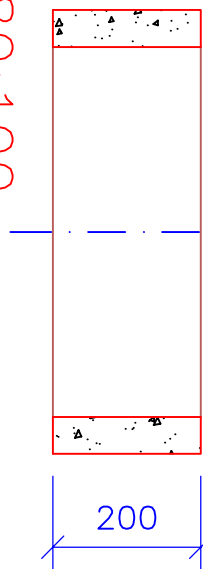

TBV-Q 600/60;80;100

krycí deska

TBV-Q 600/400/B (bez těsnění)  
spodní díl

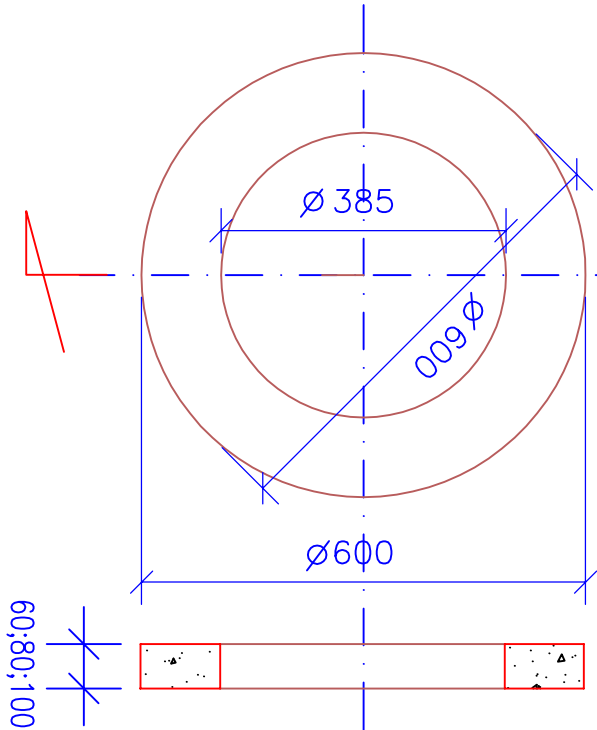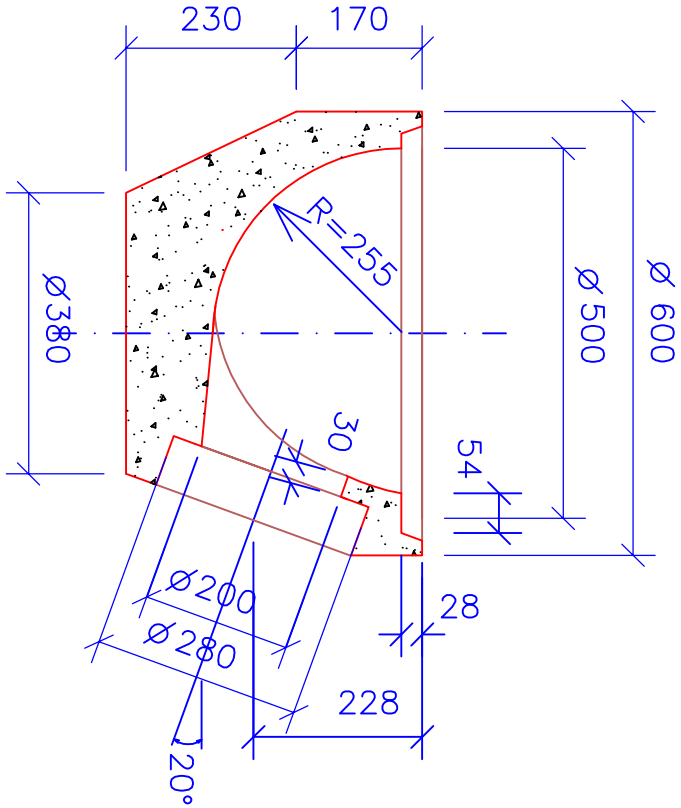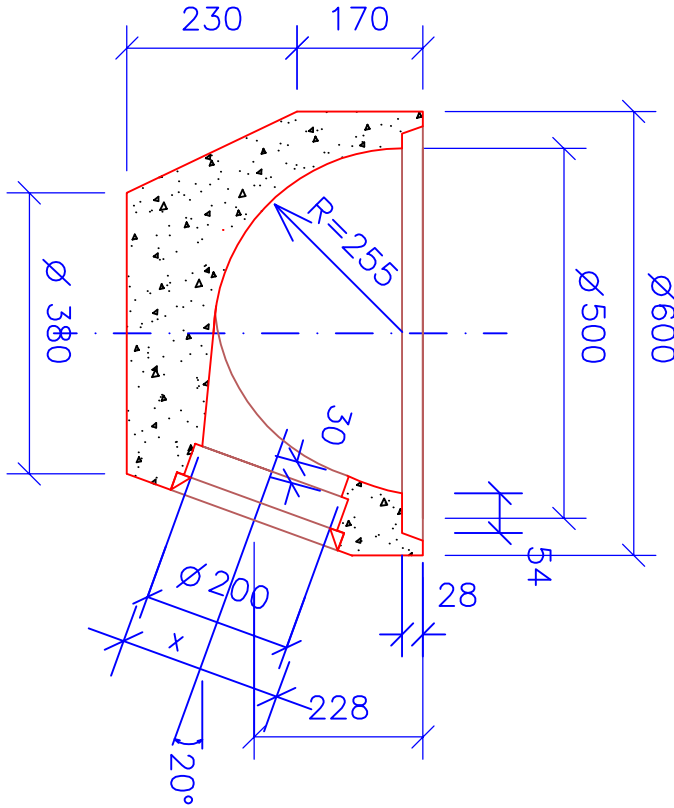

NÁZEV PRVKU	OBJEM	HMOTNOST
SKRUŽE TBV-Q 500/300/5-1;2	0.030m <sup>3</sup>	75.0kg
SKRUŽE TBV-Q 500/200/5-1;2	0.017m <sup>3</sup>	42.5kg
SKRUŽE TBV-Q 500/200/5-1a	0.017m <sup>3</sup>	42.5kg
SPOD.DÍL TBV-Q 600/400/T;B	0.036m <sup>3</sup>	90.0kg
KRYCÍ DES. TBV-Q 600/60	0.010m <sup>3</sup>	25.0kg
KRYCÍ DES. TBV-Q 600/80	0.014m <sup>3</sup>	33.0kg
KRYCÍ DES. TBV-Q 600/100	0.017m <sup>3</sup>	42.0kg
BETON C40/50 XA1		